

Motto®

Barbed wire with alternately twisted wires. The two running wires are alternately twisted between the four-point barbs.



Wire

Motto barbed wire is formed from two high-carbon steel wires, coated and twisted together alternately between four points with barbs spaced at 10cm.

- Tensile strength of the line wires: minimum 1150N/mm² (before stranding)
- Tensile strength of the barb wire: 700/900N/mm²
- Breaking load of the strand wire: minimum 4230N/mm²

Wire diameter

- Line wire: 1.70mm
- Barb wire: 1.45mm

Coating technique




The minimum Zincalu coating thickness on the line and barb wire is at 100g/m² in accordance with ISO 7989-2, Class B.

Assortment

- Length of rolls: 50-100-250-500m

Product detail

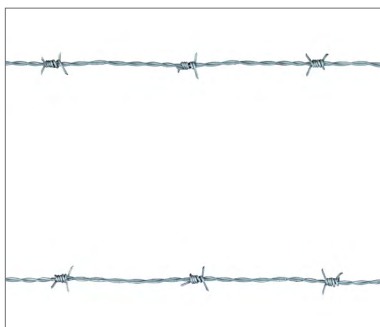

Functionalities



Europe: Blokkestraat 34b,
B-8550 Zwevegem
Tel: B: +32 56 73 46 46

USA: 3309 SW Interstate 45,
Ennis, TX 75119
Tel: +1 972 878 7000

Middle East: P.O. Box 293517 DAFZA,
Building E 5, Block A 8th Floor, Office 802
Tel: +971 04 6091122

Africa: B10, Bergriver Business Park,
Paarl, 7646
Tel: +27 021 868 7300

Betafence is the world market leader in fencing solutions, access control and detection for perimeter protection. All Betafence companies and product names are trademarks owned by PRÆSIDIAD Group Limited. Modification in products and assortment are subject to change without prior notice.

Proud to be a PRÆSIDIAD brand. Betafence is part of a global network, working alongside Hesco as a leader in perimeter security systems and solutions. For more information please visit praesidiad.com.

B BETA FENCE
Securing What Matters

betafence.com